Ambu® aScope™ 4 Broncho Large 5.8/2.8

The single-use flexible bronchoscope



Key Benefits

- Instant availability
- No risk of cross-contamination
- Cost effective
- · High degree of usability
- · Clear, sharp images
- · Smooth and easy navigation

Ambu® aScope™ 4 Broncho Large 5.8/2.8

Guaranteed sterility, ready when you are.

The single-use concept of aScope 4 Broncho once and for all solves the problem of accessibility, simplifies set-up for procedures, eliminates the need for complex cleaning procedures and minimises the risk of cross-contamination. It comes sterile straight from the pack, offering improved patient safety and workflow.

The aScope 4 Broncho Large offers high quality bronchoscopy for a broad range of procedures. When connected to the Ambu aView™ 2 Advance portable monitor, aScope 4 Broncho Large gives you clear visibility of the near and distal bronchial segments. The clear, sharp images and adaptive light control

make identification of lung anatomy and navigation in the bronchial tree easy.

The high bending angles and precise tip motion of aScope 4 Broncho Large allows you to easily navigate into all segments of the lung. The high quality handle is designed with a shaped, rippled surface to provide a comfortable grip throughout the procedure. The lightweight and ergonomic design makes aScope 4 Broncho Large easy to use.

The aScope 4 Broncho Large has a working channel of 2.8mm. It is the ideal solution for a wide range of bronchoscopy procedures.



Specifications

Optical system	
Field of View	85°
Direction of View	o° (forward viewing)
Depth of Field	6-50 mm
Illumination method	LED
Insertion portion	
Bending section	180° up, 160° down
Insertion cord diameter	5.8 mm (o.23")
Distal end diameter	6.2 mm (0.24")
Maximum diameter of insertion portion	6.3 mm (o.25")
Minimum endotracheal tube size (inner diameter)	7.0 mm
Minimum double lumen tube size (inner diameter)	-
Working length	600 mm (23.6")
Channel	
Average inner diameter	2.8 mm (0.110")
Minimum instrument channel width	2.6 mm (0.102")
Suction connector	
Connecting tube inner diameter range	Ø7 mm +/- 1 mm
Operating environment, storage & transportation	
Temperature in operating environment	10 ~ 40° C (50 to 104° F)
Temperature during transportation	10 ~ 40° C (50 to 104° F)
Temperature during storage	10 ~ 25° C (50 ~ 77° F)
Relative humidity	30 ~ 85%
Atmospheric pressure	80 ~ 109 kPa
Altitude	≤2000 m
Sterilisation	
Method of sterilisation	ETO




Ambu aScope 4 Broncho Large and Ambu aView 2 Advance



The ergonomic and lightweight handle is designed to give you a firm and comfortable grip

Ordering specifications

Item no.	Quantity (Ambu® aScope™ 4 Broncho Large ^{5.8/2.8})
478001000	5

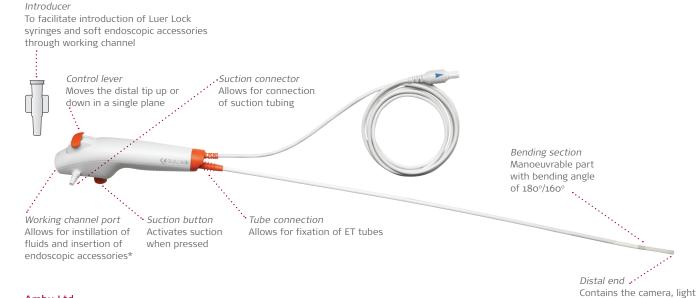

Ambu Ltd.

Incubator 2 Alconbury Weald Enterprise Campus Alconbury Weald Cambridgeshire PE28 4XA

Tel 01480 498403 Fax 01480 498405 www.ambu.co.uk

C€ ₀₀₀₀ US: Rx only

source (two LEDs), as well

as the working channel exit

493 2016 01 - V03 - 2020/01 - AMBU A/S. Technical data may be modified without further notice. TCC 10761